


Research Article

Heat Transfer and Integration of Heat Pipes: Advances, Applications, and Future Directions

Salwa Bouadila^{1,*}, 

¹Research and Technology Center of Energy, Technopole of Borj Cedria Hammam Lif -B.P. 95, 2050, Tunisia

ARTICLE INFO

Article History

Received 10 Mar 2024

Revised: 3 May 2024

Accepted 3 Jun 2024

Published 28 Jun 2024

Keywords

Heat pip,

Flat heat pipe,

Loop heat pipe.



ABSTRACT

Heat pipes are essential tools in managing heat effectively, offering remarkable efficiency by using phase change and capillary action to transfer heat. They have become indispensable in various fields, from cooling electronic devices to improving renewable energy systems and advancing aerospace technology. This paper explores the development and types of heat pipes, ranging from traditional thermosyphons to more sophisticated designs like loop and flat heat pipes. It delves into their materials, manufacturing methods, and how they are integrated into systems to maximize performance and reliability. Challenges such as overcoming thermal resistance, enhancing material durability, and ensuring functionality under extreme conditions are discussed. The role of modern techniques, like computational simulations and machine learning, in optimizing heat pipe design is also examined. By addressing these aspects, this study highlights the promise of heat pipes in creating efficient and sustainable solutions to meet today's energy and environmental demands.

1. INTRODUCTION

Energy plays an important role in human civilization. It powers industries, transportation, and residential applications. As the demand for energy continues to increase worldwide, there is a growing need for energy systems that are efficient, sustainable, and reliable. Traditional energy systems that use fossil and non-renewable resources are unsustainable and contribute significantly to environmental problems such as pollution and global warming. In connection to this, highly innovative technologies aimed at improving energy systems for increased efficiency, environmental sustainability, and a shift to renewable energy sources are increasingly finding application in research and engineering [1].

Efficient energy conversion and utilization depend heavily on heat management. Thermal management is crucial for many industrial and technological processes to enhance performance, reduce overheating and increase equipment usefulness. Heat pipes are a matured thermal management technology, which as a result of their outstanding thermal performance, continue to attract researchers' extensive interest. Simple and yet powerful heat pipes can transfer heat along considerable distances with negligible thermal resistance [2-4].

Heat pipe is a sealed device that works on phase change and capillary action. It comprises a hollow tube with working fluid inside as shown in figure (1). In the apparent end of heat pipe, heat is supplied (evaporator section) and working fluid gets converted into vapors carrying heat to the other end (condenser section) where it gets condensed back and gives off heat. The wick structure employs capillary action to bring the working fluid back into the evaporator end [5].

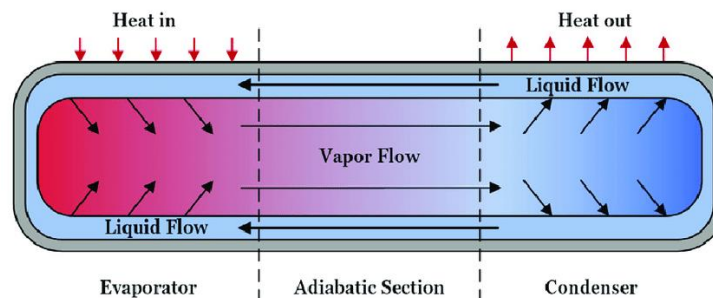


Fig.1.A heat pipe

*Corresponding author email: salwa.bouadila@crtcn.rnrt.tn

DOI: <https://doi.org/10.70470/KHWARIZMIA/2024/008>

The concept of heat pipe was introduced by Angier March Perkins in the 19th century, yet, its historical relevance only appeared in the 20th century. The actual heat pipe that is utilized today was invented by George M. Grover in 1963, a project created in the Los Alamos National Laboratory. Grover's invention evidenced the potential of heat pipes to be applied in different environments and situations as a heat transferring mean. Heat pipes evolved along the years, being used in different technologies, such as aerospace engineering for example, computers, telecommunications among others, all of which proved the importance and versatility of heat pipes in thermal management [6].

2. TYPES OF HEAT PIPES

Heat pipes developed over the years can be classified alongside with their traditional counterpart, either as thermosyphon, capillary-driven, or other designs. Thermosyphons are traditional heat pipes that use gravitational force to regulate the flow of working fluid from one end of the pipe to another. As such, thermosyphon-based heat pipes are reliable yet inexpensive forms of solutions particularly in mechanisms where the pipes are placed vertically or are tilted [11]. On the other hand, the capillary-driven design making use of the capillary action from its wick structure enables the heat pipes to be operated regardless of their orientation. This quality is crucial for applications in environment where dynamism and variability are constant [7]. Both designs have also shown to provide a consistent sensitivity in heat transfer due to their fundamental mechanism which features phase change that consequently improves thermal conductivity. Thermosyphon and capillary-driven designs are thus commonly utilized due to their thermal reliability and efficiency, establishing the foundation for further advancements in the heat pipe technology.

Advanced heat pipes have certain distinct characteristics, and in specific instances, the loop heat pipes can be a solution in certain unique conditions. One of the characteristics of the loop heat pipe has a porous wick that allows for the flow of the working fluid using capillary forces. Because of this specific characteristic, loop heat pipes promise to work in zero-gravity environments [8]. This is one of the reasons why the loop heat pipes are seeing applications in the aerospace industry, where space flight conditions offer challenges to efficient heat control. When offered with similar properties, loop heat pipes also become an equally attractive candidate for use in land-based applications where precise heat control is essential, such as in high-performance computing devices and telecommunication applications. Specific characteristics that offer adaptability, where loop heat pipes can work in any orientation or should capitalizing on gravity to produce expected results are their attractions to industry.

Flat Heat Pipe is another advanced design of heat pipe. Flat heat pipe boasts distinct features and abilities to meet highly demanding requirements and solve challenging thermal management problems. Flat heat pipes possess unique shape and configuration which is flat in nature and design. This feature makes flat heat pipe a suitable candidate solution where constraints make it difficult to use standard heat pipes which are predominantly cylindrical in shape. Flat heat pipe is essentially a thin flat enclosure that uses a wicking structure to transport energy across the surface via capillary action [8]. Flat heat pipes are designed using metallic materials such as copper and aluminum. Copper and Aluminum are also the preferred materials for the design of flat heat pipe due to their highly conductive nature. In addition, both materials are structurally strong and durable heat pipe materials whose performance is intact under challenged thermal loads. Flat heat pipes are used extensively in industries that require electronics cooling such as cooling CPUs whose tight configurations allow effective use of flat heat pipes. In addition, flat heat pipes are used in a diverse application space such as LED lighting and the cooling of flat panel displays where their thin form factor means that thermal management solutions do not compromise on the design, beauty or functionality of the final product [9].

Micro heat pipes are a specialized application of heat pipe which uniquely serves the microelectronics and small systems where its size can be used inside electronics and systems components where space is limited. Can also be used to transfer heat in tightly-bounded areas or inaccessible locations from the systems that micro heat pipe served [10]. Micro heat pipes are manufactured through micro-fabrication technology, will most likely contain small wick structure with high levels of capillary action that allows the working fluid to re-circulate even with low levels of heat input that is being pass to the heat source. This scenario is preventing microprocessors or tightly-packed electronic device and integrated circuit to overheat as too much heat can compromise the functionalities of the devices inside a microprocessor [8]. Micro heat pipes can be utilized in portable devices and simply fit in compact renewable energy systems applications where limited size and space is of utmost importance [10]. For traditional heat pipes, there are not-so-complicated systems and structure design for their performance based on application while advanced heat pipes have more factor taken into consideration before selecting the system design that will fit an application. Traditional ones with thermosyphon and capillary driven pipes are so simple, efficient and cheap for applications that can be dependent on gravity and without much change in orientation [11]. Advanced designs such as loop heat pipes and flat heat pipe are more versatile allowing them to cater different user needs that find an application that requires dynamic or changeable thermal control [8]. Knowing that loop heat pipe has complex wick structures that drain and work well in microgravity, they are advantageous in aerospace application [7]. Flat heat pipes and micro heat pipes complement each other due to demands of technology in microelectronic applications, where their size and heat dissipations are of utmost critical [10].

3. INCORPORATION TECHNIQUES

Heat pipes become an important part of thermal management systems to improving devices' heat dissipation efficiency. Examples of these thermal management systems are heat pipes used in electronics thermal management. Heat pipes are among the common and effective solutions for removing excess heat from CPUs, GPUs, and power modules. In air-cooled permanent magnet synchronous motors, heat pipes can be utilized to solve the thermal problem of these motors by dissipating excess heat on the systems [11]. Heat pipes can also be integrated into hybrid systems after advanced hybrid integration techniques further increases its application. Heat pipes can provide the required cooling in various thermal environments. Therefore, heat pipes are used in different telecommunications, automotive, aerospace and other industries considering its expected operational performance and reliability [8]

Heat pipes are manufactured using very specific processes to make sure that the materials used are suitable for their thermal properties and other specified applications. Copper and aluminum are the most commonly used materials for the fabrication of heat pipes due to their thermal conductivity and structural integrity necessary to hold under the variable temperatures and pressures during operations [8]. The typical manufacturing process involves the welding and machining of raw materials to form the body structure of the heat pipe, where a wick is inserted for capillary movement of the fluid. Micro-wick structures for the micro heat pipes are manufactured using micro-fabrication techniques to enable efficient capillary movement and heat transfer [10]. The heat pipe is then put through a pumping cycle to remove any gases present before the working fluid is introduced into the system. For all these steps involved along the way, thorough quality control processes are necessary to create a heat pipe that is reliable and efficient in its various applications.

Heat pipes used in thermal load applications should be considered from the perspective of thermal performance and structural design constraints. The main contributions into thermal performance are working fluids and wick structures depending on the thermal load path. The alignment of the heat pipe with the load and the path of the heat dissipation also constrain the performance of the heat pipe. The material choice is critical for the heat pipe operating under mechanical loads, its mechanical behaviour should be considered in design constraints.

Some challenges for integrating heat pipes into thermal management systems include thermal resistance and mechanical stress. The former hinders set efficiency, causes heat transfer loss, and reduces efficacy in applications that experience rapid thermal cycling [7]. Mechanical stress brought about by heat expansion and contraction may compromise the heat pipe itself and the system, causing premature failure or reduced lifespan [10]. Innovations in the industry today display a promising outlook on integration of heat pipes and thermal management systems which address the challenges enumerated; these include material developments and enhanced fabrication techniques for superior thermal conductivity and mechanical strength [10]. The use of hybrid nanofluids for heat pipes is suggested to provide more efficient developments in the integration of components for thermal management systems [12].

4. METHODS OF ANALYSIS

Elaboration of theoretical models and approaches for heat pipes analysis is based on the knowledge of heat transfer principles and phenomena. One of the most common assumptions in theoretical models and model-based approaches include , steady state, constant properties for idealized working fluids, flow behavior independence from gravity, among others . Model-based approaches or theoretical models also used heat transfer coefficients and thermal resistance networks to model how heat is transferred in a heat pipe. Heat transfer coefficients can represent heat transfer with phase change and thermal resistance networks can provide a clear explanation about the different heat transfer modes on a given surface . One the other hand, although theoretical models help to predict heat pipe performance, it is necessary to validate them against experimental results. The validation of numerical models against experimental results contributes to enhance the robustness and reliability of heat pipes to work under a wide range of working conditions and working fluids, especially when heat pipes are used in different applications and its performance has to be evaluated.

modes of measurement include the observation of temperature with thermocouple along the hot pipe to obtain temperature gradients from which hot pipe performance can be determined . also, calorimetric recovery is commercially applied for the determination of heat transfer rate to offer hot pipe performance under different operating conditions. such methods can be used integrate research thermal activities on hot pipes –as such, this work will provide significant information in this regard to improve design and task suitability .

Theoretical calculations can be reinforced with numerical simulations such as Computational Fluid Dynamics (CFD) and finite element methods (FEM) to assess the thermal performance and predict operating characteristics of heat pipes. CFD simulations are capable of providing and solving heat and fluid flow parameters that exist in the inner layers of the heat pipe, thus making it possible to predict its performance and efficiency under varying heat transfer conditions. CFD can also determine the role of the interactions between heat pipe internal structures and working fluid to establish design parameters that affect thermal performance [10]. On the other hand, FEM simulations can be used to determine the stresses present on the heat pipe due to the effects of temperature difference and flowing fluids and establish its ability to maintain structural

integrity and operational reliability under certain thermal operating conditions [8]. Numerical simulations are thus essential in further strengthening the theoretical calculations and experimental findings to encourage further innovations in heat pipes and their technology and applications in thermal management systems.

Heat pipes analytical techniques limitations impact their performance, and using them in practice. Theoretical analysis often relies on assumptions, such as the working fluid has constant properties, the working conditions are impossible to achieve, and that the heat flow is constant. These assumptions are the starting point for the theoretical analysis. However, the available theoretical results need to be validated in experiments, where the heat pipe's actual performance is established under controlled conditions [7]. Currently, numerical analysis of heat pipes via Computational Fluid Dynamics (CFD) methods is gaining prevalence. However, just like theoretical and experimental methods, numerical analysis has its limitations, and its results can be improved [10].

5. APPLICATIONS IN SOLAR ENERGY

Heat pipes' utilization in solar thermal collectors contributed significantly to the performance improvement and flexibility of solar collectors. The high thermal conductivity of heat pipes is used in solar thermal collectors to transfer energy from the absorber to the working fluid quickly; it lowers thermal resistance allowing more efficient collection of solar energy [12]. Advanced materials and design structures of solar thermal collectors provide better thermal performance under variable solar radiation through the evacuated tube structure and selective coating. The geometry tolerance of heat pipes permits their application in various residential and industrial solar systems [8]. This efficiency enhancement method allows following a more sustainable energy approach.

The use of heat pipes for conduction was applied on photovoltaic thermal systems as these help them attain energy recovery at their highest converting efficiency. Photovoltaic thermal (PVT) systems are able to convert both electricity and heat from solar energy and their efficiency can be depended greatly on the type of system temperature and the functioning system itself according to the needs. With the application of heat pipes on greatly impacting PVT systems, it was a process known that they had improved thermal efficiencies through the qualities of heat transfer. More specifically, the noted process that was seen was based on the reduced average cell temperature of PVT systems consequently improving the electric yield of its performance [13]. The nature of heat pipes operating superior thermal management without affecting the overall efficiency of a designed PVT was able to allow for more applications of heat work designed and aimed for improved energy recovery systems. Noted was also the ability for residual heat recovery from an energy process like the PVT system to be used and promote energy efficiency can be painted on the process of commercialization and residential installation focused solely for their heating system can then allow for greater overall yield of energy coming from the production of the said type of PVT system [8]. With that said, the disparaging nature of heat pipe to a system designed as that of PVT systems was able to improve the sustainability nature practiced along with the technology for the better application of solar energy and its processes in ultimately improve energy efficiency that promotes sure reduced carbon footprints.

Another opportunity for using heat pipes is found in the desalination systems. In particular, heat pipes significantly contributed to the improvement of the thermal efficiency and the master of system characteristics of this type of system . The basic idea of the solar desalination system was employing heat pipes that are best in thermal conductivity compared to the best known solutions to convey and supply the heat to the saline solution for desalination by evaporation. The evaporation and condensation cycles based on heat pipes allowed achieving a high output rate of freshwater produced from the saline solution [12]. The adaptability and efficiency of the desalination systems with heat pipes are attained by reduced thermal resistance of the evaporation system, which in its turn influences the energy efficiency of the solar desalination system . Heat pipe-based desalination systems have a good promise of being actively implemented in practice as the means of regulating the management of water resources in the regions where there are a lot of unnavigated water resources, but a shortage of freshwater for drinking and technical needs [12].

Heat pipes have shown a promising improvement in freshwater productivity and efficiency using tubular solar stills. A heat pipe in a tracked tubular solar still (TSS) combined with a parabolic trough concentrator can increase freshwater production of 25% to 40% with an efficiency increment of 25% [14]. This result, however, relies on optimizing the production parameters such as improving the tilt angle of the still and water depth. Water depth raises freshwater increase of about 16% at 10° and 20% at 15° when changing thickness from 5.5 to 6.5 cm. These findings underscore the potential of heat pipes to enhance the efficacy of solar desalination systems, leading to sustainable and efficient energy solutions.

Various performance case studies on heat pipes applied in solar energy systems have also shown significant potential gains. In the heat pipe solar thermal collector system case study, results showed that the system had at least 15% more efficiency than the usual collector system. This is attributed to heat pipes' lower thermal resistance and superior heat transfer properties [12]. Another performance case study is on PVT systems. The technology used improved the electricity outputs, but even more so, heat pipe technology also augmented the thermal energy recovery by around 20%, which means enhanced total energy harvesting performance [13]. Lastly, the heat pipe systems used for solar desalination applications proved to be more effective in terms of total freshwater productivity outputs. Correspondingly, heat pipes helped obtain steady-state thermal operational conditions needed in the evaporation and condensation cycles [12]. All these improvements in

performance show the potential benefits of heat pipe technology in solar energy systems, which could promote sustainability and efficiency in the utilization of energy.

6. CHALLENGES AND FUTURE DIRECTIONS

Nevertheless, the heat pipes performance also has some technical and material constraints. The first one is wick induced thermal resistance. Wick is a heat pipe's essential component, but the wick can also be a limit for a heat pipe performance. In some conditions, it is even possible that a wick be a thermal barrier [10]. Heat pipe materials' durability is another constraint for it. In high-temperature environments, materials in heat pipes form cracks and at high temperatures material loosening form due to cyclical operation [15]. The boiling point of the working fluid and its thermal properties are limits to heat pipe performance. A fluid is employed when the heat pipe assembles. If there is no fluid change, it can lose heat. It occurs when heat pipes operate with excessive temperatures, and desired performance has not achieved [7]. It is essential to improve heat pipes to accommodate modern and cutting-edge applications that have serious constraints. It is required to do research to enhance heat pipes, including selections of material and designs.

Recently, advancements in the heat pipe technology and analysis techniques have improved the thermal control effectiveness of heat pipes in multipurpose applications. A novel trend was the introduction of hybrid nanofluids, which employed a variety of nanoparticles to increase the fluid's thermal conductivity and lower thermal resistance with its base fluid [10]. It has shown promising implementation in the high heat removal domains of electronics cooling and renewable energy applications. Likewise, modeling and simulation of machine learning techniques were employed in predicting heat pipes thermal performance, which facilitates the optimization phase of the design more accurately and efficiently [7]. In sum, the trends in heat pipe technology demonstrate the versatility and development of heat pipes in meeting the demands of more complex thermal characteristics of operational systems.

Moreover, heat pipes are characterized as environmentally friendly and economically feasible. The technology can deliver significant cost savings as a result of improved thermal control, enabling reduced reliance on active cooling systems and lower HVAC operating costs [10]. Furthermore, the lack of need for external power supply, adds an advantage of using heat pipes from an environmental viewpoint, accentuating their promise to add towards green energy use and development [8]. In terms of its manufacturability, improved techniques allowed for lowered heat pipe production costs, resulting in lower initial investments in their operation [11]. Nonetheless, further research is required on determining the opportunities related to material and design adaptations to sustain heat pipes' feasibility and economic performance in the future [8].

While there has been significant development in heat pipe technology, there are still ongoing challenges that need to address in the future works to improve its ability in heat dissipation. One was to identify the approaches for developing materials with enhanced thermal and mechanical properties that can withstand extreme environment applications [8]. In addition, machine learning tool can be implemented in the heat pipe design for accurate prediction of heat carrying capacity of the working fluid that can influence the effective thermal management program [7]. Moreover, application of hybrid nanofluids in heat pipe can be the subject of future studies as it offers better heat transfer property that can support efficient heat loss needs [10]. These improvements in heat pipe technology pose the need to have different fields of disciplines for its success in solving the challenges ahead.

7. CONCLUSIONS

As a final point, the review carried out in the present literature, has highlighted the role played by heat pipes in actual thermal management systems and the vast scope of their application in many disciplines. In this regard, both traditional and advanced heat pipes provide advantageous features and solutions to efficiently transfer heat in applications such as microelectronics and renewable energy systems. Integration techniques and manufacturing processes have been established, with the aim to provide effective solutions to the challenges posed by thermal resistance and mechanical constraints. Furthermore, advances in analytical tools such as theoretical models and experimental techniques have enabled an improved comprehension of heat pipe behavior and have contributed to their implementation in systems of increasing complexity. Future advances in the development and promotion of heat pipe technology are likely to keep establishing effective and sustainable thermal management systems, maintaining the heat pipe tendency to become an essential technology to address the energy and environmental issues faced by our society.

Funding:

This study did not receive any form of external financial assistance or grants. The authors confirm that all research costs were covered independently.

Conflicts of Interest:

The authors have no conflicts of interest to disclose.

Acknowledgment:

The authors are sincerely grateful to their institutions for their continued support and trust, which greatly contributed to the completion of this research.

References

- [1] S. J. Shbailat, R. M. Rasheed, R. J. Muhi, and A. A. Mohammed, "Effect of the 40-PPI copper foam layer height on the solar cooker performance," *Open Engineering*, vol. 13, no. 1, Jan. 2023, doi: 10.1515/eng-2022-0471.
- [2] M. J. Al-Dulaimi, A. A. A. Rasool, and F. A. Hamad, "Investigation of impingement heat transfer for air-sand mixture flow," *The Canadian Journal of Chemical Engineering*, vol. 94, no. 1, pp. 134–141, Nov. 2015, doi: 10.1002/cjce.22364.
- [3] K. A. Ameen, H. A. Hasan, M. J. Al-Dulaimi, A. M. Abed, and H. F. Al-Qrimli, "Improving the performance of air conditioning unit by using a hybrid technique," *MethodsX*, vol. 9, p. 101620, 2022, doi: 10.1016/j.mex.2022.101620.
- [4] K. A. Ameen, H. A. Hasan, M. J. Al-Dulaimi, A. M. Abed, and H. F. Al-Qrimli, "Improving the performance of air conditioning unit by using a hybrid technique," *MethodsX*, vol. 9, p. 101620, 2022, doi: 10.1016/j.mex.2022.101620.
- [5] L. L. Vasiliev, "Heat pipes in modern heat exchangers," *Applied Thermal Engineering*, vol. 25, no. 1, pp. 1–19, Jan. 2005, doi: 10.1016/j.applthermaleng.2003.12.004.
- [6] Y. Maydanik, V. Pastukhov, and M. Chernysheva, "Development and investigation of a loop heat pipe with a high heat-transfer capacity," *Applied Thermal Engineering*, vol. 130, pp. 1052–1061, Feb. 2018, doi: 10.1016/j.applthermaleng.2017.11.084.
- [7] M. H. Ahmadi, R. Kumar, M. E. H. Assad, and P. T. T. Ngo, "Applications of machine learning methods in modeling various types of heat pipes: A review," *Journal of Thermal Analysis and Calorimetry*, vol. 146, no. 6, pp. 2333–2341, 2021.
- [8] R. K. Bumataria, N. K. Chavda, and H. Panchal, "Current research aspects in mono and hybrid nanofluid based heat pipe technologies," *Heliyon*, vol. 5, no. 5, 2019.
- [9] S. Zhang *et al.*, "Experimental study on the thermal performance of a novel ultra-thin aluminum flat heat pipe," *Renewable Energy*, vol. 135, pp. 1133–1143, May 2019, doi: 10.1016/j.renene.2018.12.097.
- [10] B. H. Yan, C. Wang, and L. G. Li, "The technology of micro heat pipe cooled reactor: A review," *Annals of Nuclear Energy*, vol. 135, p. 106948, 2020.
- [11] G. Fang, W. Yuan, Z. Yan, Y. Sun, and Y. Tang, "Thermal management integrated with three-dimensional heat pipes for air-cooled permanent magnet synchronous motor," *Applied Thermal Engineering*, vol. 152, pp. 594–604, 2019.
- [12] S. Shoeibi, S. A. A. Mirjalily, H. Kargarsharifabad, M. Khiadani, and H. Panchal, "A comprehensive review on performance improvement of solar desalination with applications of heat pipes," *Desalination*, vol. 540, p. 115983, 2022.
- [13] T. Zhang, Z. W. Yan, L. Xiao, H. D. Fu, G. Pei, and J. Ji, "Experimental study and design sensitivity analysis of a heat pipe photovoltaic/thermal system," *Applied Thermal Engineering*, vol. 162, p. 114318, 2019.
- [14] M. J. Al-Dulaimi and K. E. Amori, "A tubular solar still integrated with a heat pipe," *Heat Transfer*, vol. 52, no. 4, pp. 3353–3371, 2023.
- [15] D. M. Weragoda, G. Tian, A. Burkitbayev, K. H. Lo, and T. Zhang, "A comprehensive review on heat pipe based battery thermal management systems," *Applied Thermal Engineering*, vol. 224, p. 120070, 2023.